
Hopup

A variety of sizes, kits and options of Hopup displays are available.

Hopup tension fabric displays are simple, versatile and can be set up in seconds. Hopups feature a lightweight, durable frame that holds a curved or straight fabric mural. Simply attach the graphic, pop (expand) the frame and you have an exhibit. All curved and straight Hopups are available with and without end caps.



Stabilizer feet on all straight frames 3 quads high

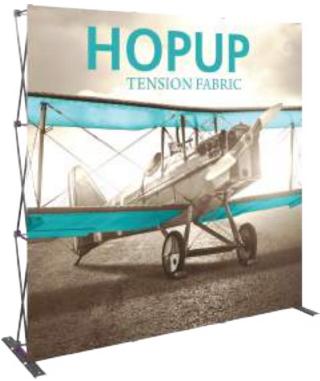

hook and loop fastener end-caps

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Lighter weight anodized silver frame with a smaller footprint
- Stabilizer feet on all straight frames 3 guads high
- Grey in-molded hook and loop fastener end
- Supports an integrated fabric graphic mural (end caps also available)
- Easy assembly
- Rolling carry bag included with most units
- LED lighting available
- Lifetime hardware warranty against manufacturer defects
- Graphics sizes changed slightly due to new frame sizes vet old graphics are compatible with new frames

dimensions:

Straight Frames:

1x1: 31"w x 31"h x 12"d

1x3: 31"w x 90"h x 29"d

2x1: 60.5"w x 31"h x 12"d 2x2: 60.5"w x 60.5"h x 12"d

3x2: 89.5"w x 60.5"h x 12"d

2x3: 60.5"w x 90"h x 29"d

3x3: 89.5"w x 90"h x 29"d

3x4: 89.5"w x 119"h x 29"d

4x3: 119"w x 90"h x 29"d

4x4: 119"w x 119"h x 29"d

5x3: 147.25"w x 90"h x 29"d 5x4: 147.8"w x 119"h x 29"d

6x3: 178"w x 90"h x 29"d

8x3: 235.43"w x 90"h x 29"d **12x3**: 352.28"w x 90"h x 29"d

Curved Frames:

Graphics:

information.

templates

1x3: 31"w x 90"h x 12.5"d

2x1: 64"w x 31"h x 18"d

2x2: 64"w x 60.5"h x 18"d

3x2: 92"w x 60.5"h x 23"d

2x3: 64"w x 89 5"h x 18"d

3x3: 92"w x 89.5"h x 23"d

3x4: 92"w x 119"h x 23"d

4x3: 116.25"w x 89.5"h x 33"d

4x4: 116.25"w x 119"h x 33"d

5x3: 136.5"w x 89.5"h x 42"d

5x4: 136.5"w x 119"h x 42"d

6x3: 154"w x 89.5"h x 61.25"d

Refer to related graphic template for more

Visit exhibitors-handbook.com/graphic-

Straight Frames:

1x1: 37" | x 10" w x 10" h / 10 lbs.

Shipping: All kits ship in one box

1x3: 37" | x 10" w x 10" h / 10 lbs

2x1: 37" | x 10" w x 10" h / 12 lbs.

2x2: 37" | x 10" w x 10" h / 16 lbs.

3x2: 37" | x 13" w x 12" h / 21 lbs.

2x3: 37" | x 13" w x 12" h / 24 lbs.

3x3: 37" | x 13" w x 12" h / 28 lbs.

3x4: 37" | x 15" w x 13" h / 35 lbs.

4x3: 37" | x 15" w x 13" h / 35 lbs.

4x4: 37" | x 15" w x 13" h/ 34 lbs.

5x3: 37" | x 15" w x 13" h / 37 lbs.

5x4: 37" | x 18" w x 13" h/ 41 lbs.

6x3: 37" | x 18" w x 13" h / 43 lbs.

8x3: 37" | x 30" w x 11" h / 70 lbs.

12x3: 37" | x 30" w x 11" h / 86 lbs

Curved Frames:

1x3: 37" | x 10" w x 10" h / 10 lbs.

2x1: 37" | x 10" w x 10" h / 12 lbs.

2x2: 37" | x 10" w x 10" h / 16 lbs.

3x2: 37" | x 13" w x 12" h / 21 lbs.

2x3: 37" | x 13" w x 12" h / 20 lbs.

3x3: 37" | x 13" w x 12" h / 25 lbs.

3x4: 37"l x 15"w x 13"h / 32lbs.

4x3: 37" | x 15" w x 13" h / 32 lbs.

4x4: 36" | x 15" w x 13" h / 35 lbs.

5x3: 37" | x 15" w x 13" h / 35 lbs.

5x4· 37" | x 18" w x 13" h / 38 lbs

6x3: 36" | x 18" w x 13" h / 43 lbs


additional information:


- Replacement parts available
- Refer to page 4 for curved Hopup frame footprints
- Refer to page 5 for straight Hopup frame footprints
- Lights & accessories are available
- 4x3 Hopup now packs with a rollerbag into the OCX or OC-HOP case (both optional upgrade)
- 8x3 Hopup now packs into the OCX (optional upgrade)
- 12x3 Hopup now packs into the OCH2 (optional upgrade)


In-molded


SET-UP: GRAPHIC COMES ATTACHED



















Pull end caps down to corner of frame and attach to hook and loop fastener on grey hubs. Repeat for each 7 corner.










Start with the largest end of the opening; Slide stabilizer foot over both hubs. Feet will fit snuggly over hubs.












TO COLLAPSE



To collapse unit, first remove end cap graphics on both sides and fold onto top of frame. 1







Continue to collapse frame, making sure graphic and webbing do not entangle with purple locking arms. 4



Store unit into rolling bag. Be sure bag straps do not wrap around purple locking arms. 5


to ensure quality, please note:




If the webbing is wrapped around the purple locking arm, the arm can snap off when opening the unit.



When packing unit in the bag, ensure that the strap is not partially wrapped around an arm. If it is, the arm will snap when pulled out of the bag.



Do not use the purple locking arm to lift unit. ALWAYS lift by the frame.



To detach the female arm, remove the screw, steel plate and hook and loop fastener webbing. Pull the arm off the hub.



Attach the female arm by popping it into the hub. Fasten the screw through the steel plate hole and the hook and loop fastener webbing tapping into the female arm.



To detach the male arm, pull the arm off the hub.




Simply pop in the male arm into the hub.



Both arms should align to snap lock together.


Curved Hopup

The curved HopUp gives your tension fabric backwall visual interest and dimension.

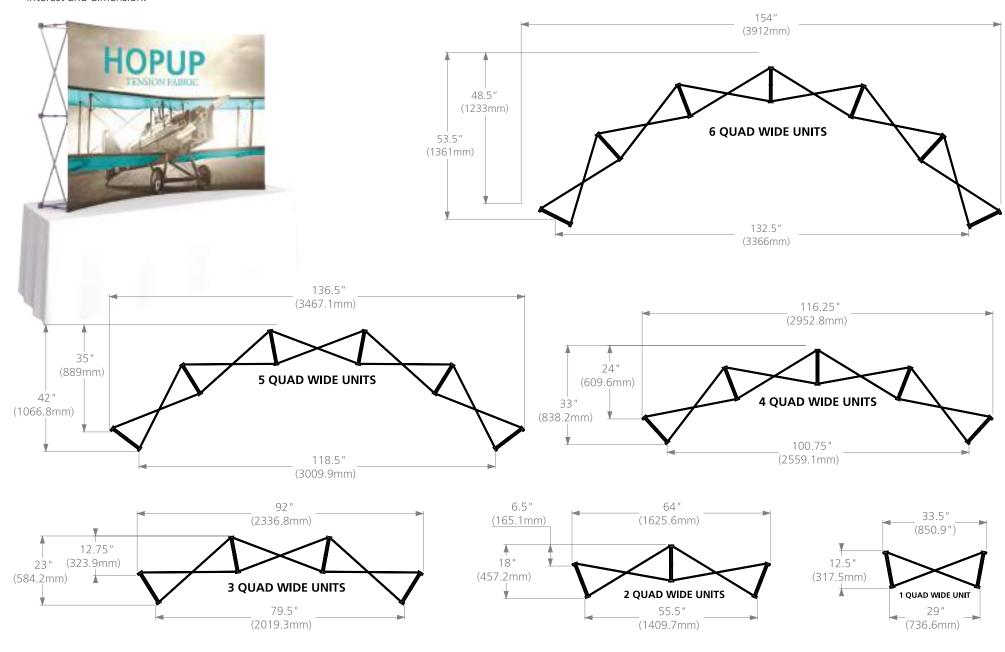

Straight Hopup

Straight Hopup frame footprints fit in a wide range of floor spaces. Stabilizer feet present on all straight frames 3 quads high.

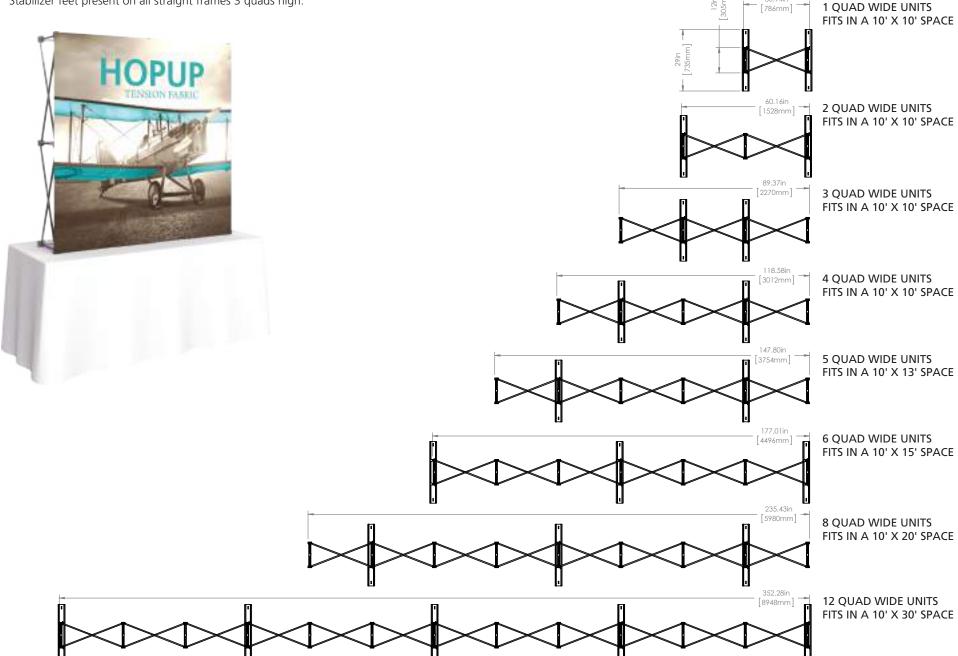


Hopup Help Guide

Removing a Damaged Locking Arm



1. The unit starts together.

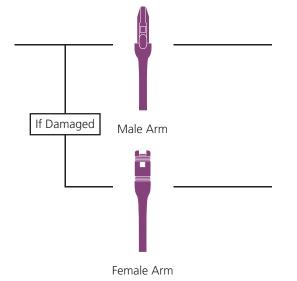



M1. **Unbuckle** the male and female arms then gently tilt either arm up or down.



F1. **Unscrew** the plate and female arm from the frame hub.



M2. Loosen the male arm by wiggling side to side and remove by pulling to one side.



F2. Remove the female arm as in M2.; wiggle side to side and **pull out to one side**.

Installing a New Arm



1. Insert the male arm into the frame hub.



3B. Lock the arm into place by **pushing the two sides** of the frame together.



2. Insert the female arm into the frame hub.



4. Secure the female arm by **screwing** the plate to the frame hub.



3. **Line up** the female arm to the frame hub (3A.) and push into place (3B.).



5. The unit is assembled.



3A. **Make contact** when lining up the female arm and the frame hub for easier connection.

Other tips:

- When removing a damaged locking arm, unbuckle nearby arms to relieve tension.
- Drill straight in the middle of the plate when attaching the female arm to ensure security.

Check out these related products:



Hopup 1x1 Straight



Hopup 2x1 Straight



Hopup 2x2 Straight



Hopup 2x2 Curved



Hopup 3x2 Straight



Hopup 3x2 Curved



Hopup counter



Hopup 1x3 Straight



Hopup 2x3 Straight



Hopup 3x3 Straight



Hopup 3X4 Straight



Hopup 4x3 Straight



Hopup 5x3 Straight



Hopup 5x4 Straight



Hopup 6x3 Straight



Hopup 8x3 Straight



Hopup 12x3 Straight

Check out these related products:



Hopup 1x3 Curved



Hopup 2x3 Curved



Hopup 3x3 Curved



Hopup 3x4 Curved



Hopup 4x3 Curved



Hopup 5x3 Curved



Hopup 5x4 Curved



Hopup 6x3 Curved



Hopup 2x2 Curved Backlit



Hopup 3x3 Curved Backlit



Hopup 4x3 Curved Backlit



Hopup Dimension Kit 01



Hopup Dimension Kit 02



Hopup Dimension Kit 03



Hopup Dimension Kit 04